



FRONT ATTACHMENT SUPPORT KIT

INSTALL KIT


Parts in Kit

QTY:	Description
2	Plate, Front Hitch Mount
8	M12X45 Bolt
8	M12 Nut

Note: Retain these installation instructions with the machine operator's manual

Parking Safely

1. Stop machine on a level surface, not on a slope.
2. Disengage PTO and stop attachments.
3. Lower attachments to the ground.
4. Lock park brake.
5. Stop engine.
6. Remove key.
7. Wait for engine and all moving parts to stop before you leave the operator's station.
8. Close fuel shut off valve before servicing the fuel system, if your machine is equipped.
9. Disconnect the battery ground cable before making repairs to electrical system or doing any welding.

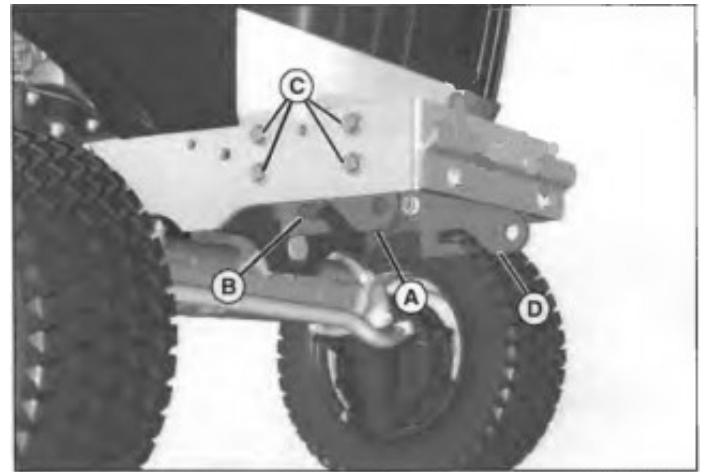

MX46409

1. Position one front hitch mount plate (A) to inside of frame, with the rear of notch (B) pointing toward rear of machine.

NOTE: If a mid-mower front mounting attachment is installed, bolts © will be used to secure mid-mower front mounting brackets and hitch mount plates.

2. Secure plate to frame with four M12x45 bolts © and four M12 nuts. Tighten to 140 N·M (105 lb-ft).
3. Repeat steps to install second mount plate (D) on opposite side of machine.